

With its compact footprint and user-friendly operation, the **Tattoo Rewrite** allows you to erase and print the same card up to 500 times.

The 300 dpi standard resolution and the large print area provide unrivalled freedom when designing cards. Enhance your cards with more texts and graphics (logos, barcodes).

Its compact and sleek design makes it the ideal equipment to integrate and use in multiple environments: offices, reception desks, points of sale, etc.

With the **Tattoo Rewrite**, you can generate or update loyalty cards, visitor badges or membership cards within seconds. Data can be edited on the spot and the same card can be reprinted or reused up to 500 times.

The **Tattoo Rewrite** will help you save significant money since no ribbon is required and cards are reused, which makes it an environmentally sound solution as well.

Tattoo Rewrite,
Renew your Ideas

PRINT MODE

- Monochrome direct thermal (black or blue) - Erasable & rewritable
- Line mode for text, barcode and logo printing
- Diffusion mode for image/photo printing

PRINTER FEATURES

- Automatic card thickness adjustment
- Automatic card loading with feeder or hand- feed (card by card)

PRINTING FEATURES

Personalization throughput will depend on card design and printer settings.

- Erase/print cycle: 8 seconds
- Print resolution: 300 dpi
- Maximum print area: 48 x 80 mm (1.90" x 3.15")

DRIVERS

- Windows™ NT 4.0, 2000 and XP



1. Clause governing the use of Evolis approved supplies.
Subject to observance of maintenance procedures.

300 cards (0.25 mm - 10 mil) - 100 cards (0.76 mm - 30 mil)

Code 39, Code 2/5 interleaved

Arial normal 100, Arial bold 100

Height: 166 mm (6.52") - Length: 290 mm (11.42") - Width: 187 mm (7.36")

2.5 Kg (5.5 lbs)

USB and parallel Centronics ports (cables supplied), RS 232 on request

Power supply: 100-240 V AC, 50-60 Hz, 1.8 A - Printer: 24 V DC, 3 A

Min / max operating temperature: 15° / 30° C (59° / 86° F)
Humidity: 20% to 65% non-condensing
Min / max storage temperature: -5° / +70° C (23° / 158° F)
Storage humidity: 20% to 70% non-condensing

Safety: CE mark (EN 60950)
EMC: CE mark B-Class / FCC B-Class

300 cards (0.25 mm - 10 mil) - 100 cards (0.76 mm - 30 mil)

Code 39, Code 2/5 interleaved

Arial normal 100, Arial bold 100

Height: 166 mm (6.52") - Length: 290 mm (11.42") - Width: 187 mm (7.36")

2.5 Kg (5.5 lbs)

USB and parallel Centronics ports (cables supplied), RS 232 on request

Power supply: 100-240 V AC, 50-60 Hz, 1.8 A - Printer: 24 V DC, 3 A

Min / max operating temperature: 15° / 30° C (59° / 86° F)
Humidity: 20% to 65% non-condensing
Min / max storage temperature: -5° / +70° C (23° / 158° F)
Storage humidity: 20% to 70% non-condensing

Safety: CE mark (EN 60950)
EMC: CE mark B-Class / FCC B-Class

300 cards (0.25 mm - 10 mil) - 100 cards (0.76 mm - 30 mil)

Code 39, Code 2/5 interleaved

Arial normal 100, Arial bold 100

Height: 166 mm (6.52") - Length: 290 mm (11.42") - Width: 187 mm (7.36")

2.5 Kg (5.5 lbs)

USB and parallel Centronics ports (cables supplied), RS 232 on request

Power supply: 100-240 V AC, 50-60 Hz, 1.8 A - Printer: 24 V DC, 3 A

Min / max operating temperature: 15° / 30° C (59° / 86° F)
Humidity: 20% to 65% non-condensing
Min / max storage temperature: -5° / +70° C (23° / 158° F)
Storage humidity: 20% to 70% non-condensing

Safety: CE mark (EN 60950)
EMC: CE mark B-Class / FCC B-Class

300 cards (0.25 mm - 10 mil) - 100 cards (0.76 mm - 30 mil)

Code 39, Code 2/5 interleaved

Arial normal 100, Arial bold 100

Height: 166 mm (6.52") - Length: 290 mm (11.42") - Width: 187 mm (7.36")

2.5 Kg (5.5 lbs)

USB and parallel Centronics ports (cables supplied), RS 232 on request

Power supply: 100-240 V AC, 50-60 Hz, 1.8 A - Printer: 24 V DC, 3 A

Min / max operating temperature: 15° / 30° C (59° / 86° F)
Humidity: 20% to 65% non-condensing
Min / max storage temperature: -5° / +70° C (23° / 158° F)
Storage humidity: 20% to 70% non-condensing

Safety: CE mark (EN 60950)
EMC: CE mark B-Class / FCC B-Class

300 cards (0.25 mm - 10 mil) - 100 cards (0.76 mm - 30 mil)

Code 39, Code 2/5 interleaved

Arial normal 100, Arial bold 100

Height: 166 mm (6.52") - Length: 290 mm (11.42") - Width: 187 mm (7.36")

2.5 Kg (5.5 lbs)

USB and parallel Centronics ports (cables supplied), RS 232 on request

Power supply: 100-240 V AC, 50-60 Hz, 1.8 A - Printer: 24 V DC, 3 A

Min / max operating temperature: 15° / 30° C (59° / 86° F)
Humidity: 20% to 65% non-condensing
Min / max storage temperature: -5° / +70° C (23° / 158° F)
Storage humidity: 20% to 70% non-condensing

Safety: CE mark (EN 60950)
EMC: CE mark B-Class / FCC B-Class

300 cards (0.25 mm - 10 mil) - 100 cards (0.76 mm - 30 mil)

Code 39, Code 2/5 interleaved

Arial normal 100, Arial bold 100

Height: 166 mm (6.52") - Length: 290 mm (11.42") - Width: 187 mm (7.36")

2.5 Kg (5.5 lbs)

USB and parallel Centronics ports (cables supplied), RS 232 on request

Power supply: 100-240 V AC, 50-60 Hz, 1.8 A - Printer: 24 V DC, 3 A

Min / max operating temperature: 15° / 30° C (59° / 86° F)
Humidity: 20% to 65% non-condensing
Min / max storage temperature: -5° / +70° C (23° / 158° F)
Storage humidity: 20% to 70% non-condensing

Safety: CE mark (EN 60950)
EMC: CE mark B-Class / FCC B-Class

300 cards (0.25 mm - 10 mil) - 100 cards (0.76 mm - 30 mil)

Code 39, Code 2/5 interleaved

Arial normal 100, Arial bold 100

Height: 166 mm (6.52") - Length: 290 mm (11.42") - Width: 187 mm (7.36")

2.5 Kg (5.5 lbs)

USB and parallel Centronics ports (cables supplied), RS 232 on request

Power supply: 100-240 V AC, 50-60 Hz, 1.8 A - Printer: 24 V DC, 3 A

Min / max operating temperature: 15° / 30° C (59° / 86° F)
Humidity: 20% to 65% non-condensing
Min / max storage temperature: -5° / +70° C (23° / 158° F)
Storage humidity: 20% to 70% non-condensing

Safety: CE mark (EN 60950)
EMC: CE mark B-Class / FCC B-Class

300 cards (0.25 mm - 10 mil) - 100 cards (0.76 mm - 30 mil)

Code 39, Code 2/5 interleaved

Arial normal 100, Arial bold 100

Height: 166 mm (6.52") - Length: 290 mm (11.42") - Width: 187 mm (7.36")

2.5 Kg (5.5 lbs)

USB and parallel Centronics ports (cables supplied), RS 232 on request

Power supply: 100-240 V AC, 50-60 Hz, 1.8 A - Printer: 24 V DC, 3 A

Min / max operating temperature: 15° / 30° C (59° / 86° F)
Humidity: 20% to 65% non-condensing
Min / max storage temperature: -5° / +70° C (23° / 158° F)
Storage humidity: 20% to 70% non-condensing

Safety: CE mark (EN 60950)
EMC: CE mark B-Class / FCC B-Class

300 cards (0.25 mm - 10 mil) - 100 cards (0.76 mm - 30 mil)

Code 39, Code 2/5 interleaved

Arial normal 100, Arial bold 100

Height: 166 mm (6.52") - Length: 290 mm (11.42") - Width: 187 mm (7.36")

2.5 Kg (5.5 lbs)

USB and parallel Centronics ports (cables supplied), RS 232 on request

Power supply: 100-240 V AC, 50-60 Hz, 1.8 A - Printer: 24 V DC, 3 A

Min / max operating temperature: 15° / 30° C (59° / 86° F)
Humidity: 20% to 65% non-condensing
Min / max storage temperature: -5° / +70° C (23° / 158° F)
Storage humidity: 20% to 70% non-condensing

Safety: CE mark (EN 60950)
EMC: CE mark B-Class / FCC B-Class

300 cards (0.25 mm - 10 mil) - 100 cards (0.76 mm - 30 mil)

Code 39, Code 2/5 interleaved

Arial normal 100, Arial bold 100

Height: 166 mm (6.52") - Length: 290 mm (11.42") - Width: 187 mm (7.36")

2.5 Kg (5.5 lbs)

USB and parallel Centronics ports (cables supplied), RS 232 on request

Power supply: 100-240 V AC, 50-60 Hz, 1.8 A - Printer: 24 V DC, 3 A

Min / max operating temperature: 15° / 30° C (59° / 86° F)
Humidity: 20% to 65% non-condensing
Min / max storage temperature: -5° / +70° C (23° / 158° F)
Storage humidity: 20% to 70% non-condensing

Safety: CE mark (EN 60950)
EMC: CE mark B-Class / FCC B-Class

300 cards (0.25 mm - 10 mil) - 100 cards (0.76 mm - 30 mil)

Code 39, Code 2/5 interleaved

Arial normal 100, Arial bold 100

Height: 166 mm (6.52") - Length: 290 mm (11.42") - Width: 187 mm (7.36")

2.5 Kg (5.5 lbs)

USB and parallel Centronics ports (cables supplied), RS 232 on request

Power supply: 100-240 V AC, 50-60 Hz, 1.8 A - Printer: 24 V DC, 3 A

Min / max operating temperature: 15° / 30° C (59° / 86° F)
Humidity: 20% to 65% non-condensing
Min / max storage temperature: -5° / +70° C (23° / 158° F)
Storage humidity: 20% to 70% non-condensing

Safety: CE mark (EN 60950)
EMC: CE mark B-Class / FCC B-Class

300 cards (0.25 mm - 10 mil) - 100 cards (0.76 mm - 30 mil)

Code 39, Code 2/5 interleaved

Arial normal 100, Arial bold 100

Height: 166 mm (6.52") - Length: 290 mm (11.42") - Width: 187 mm (7.36")

2.5 Kg (5.5 lbs)

USB and parallel Centronics ports (cables supplied), RS 232 on request

Power supply: 100-240 V AC, 50-60 Hz, 1.8 A - Printer: 24 V DC, 3 A

Min / max operating temperature: 15° / 30° C (59° / 86° F)
Humidity: 20% to 65% non-condensing
Min / max storage temperature: -5° / +70° C (23° / 158° F)
Storage humidity: 20% to 70% non-condensing

Safety: CE mark (EN 60950)
EMC: CE mark B-Class / FCC B-Class

300 cards (0.25 mm - 10 mil) - 100 cards (0.76 mm - 30 mil)

Code 39, Code 2/5 interleaved

Arial normal 100, Arial bold 100

Height: 166 mm (6.52") - Length: 290 mm (11.42") - Width: 187 mm (7.36")

2.5 Kg (5.5 lbs)

USB and parallel Centronics ports (cables supplied), RS 232 on request

Power supply: 100-240 V AC, 50-60 Hz, 1.8 A - Printer: 24 V DC, 3 A

Min / max operating temperature: 15° / 30° C (59° / 86° F)
Humidity: 20% to 65% non-condensing
Min / max storage temperature: -5° / +70° C (23° / 158° F)
Storage humidity: 20% to 70% non-condensing

Safety: CE mark (EN 60950)
EMC: CE mark B-Class / FCC B-Class

300 cards (0.25 mm - 10 mil) - 100 cards (0.76 mm - 30 mil)

Code 39, Code 2/5 interleaved

Arial normal 100, Arial bold 100

Height: 166 mm (6.52") - Length: 290 mm (11.42") - Width: 187 mm (7.36")

2.5 Kg (5.5 lbs)

USB and parallel Centronics ports (cables supplied), RS 232 on request

Power supply: 100-240 V AC, 50-60 Hz, 1.8 A - Printer: 24 V DC, 3 A

Min / max operating temperature: 15° / 30° C (59° / 86° F)
Humidity: 20% to 65% non-condensing
Min / max storage temperature: -5° / +70° C (23° / 158° F)
Storage humidity: 20% to 70% non-condensing

Safety: CE mark (EN 60950)
EMC: CE mark B-Class / FCC B-Class

300 cards (0.25 mm - 10 mil) - 100 cards (0.76 mm - 30 mil)

Code 39, Code 2/5 interleaved

Arial normal 100, Arial bold 100

Height: 166 mm (6.52") - Length: 290 mm (11.42") - Width: 187 mm (7.36")

2.5 Kg (5.5 lbs)

USB and parallel Centronics ports (cables supplied), RS 232 on request

Power supply: 100-240 V AC, 50-60 Hz, 1.8 A - Printer: 24 V DC, 3 A

Min / max operating temperature: 15° / 30° C (59° / 86° F)
Humidity: 20% to 65% non-condensing
Min / max storage temperature: -5° / +70° C (23° / 158° F)
Storage humidity: 20% to 70% non-condensing

Safety: CE mark (EN 60950)
EMC: CE mark B-Class / FCC B-Class

300 cards (0.25 mm - 10 mil) - 100 cards (0.76 mm - 30 mil)

Code 39, Code 2/5 interleaved

Arial normal 100, Arial bold 100

Height: 166 mm (6.52") - Length: 290 mm (11.42") - Width: 187 mm (7.36")

2.5 Kg (5.5 lbs)

USB and parallel Centronics ports (cables supplied), RS 232 on request

Power supply: 100-240 V AC, 50-60 Hz, 1.8 A - Printer: 24 V DC, 3 A

Min / max operating temperature: 15° / 30° C (59° / 86° F)
Humidity: 20% to 65% non-condensing
Min / max storage temperature: -5° / +70° C (23° / 158° F)
Storage humidity: 20% to 70% non-condensing

Safety: CE mark (EN 60950)
EMC: CE mark B-Class / FCC B-Class

300 cards (0.25 mm - 10 mil) - 100 cards (0.76 mm - 30 mil)

Code 39, Code 2/5 interleaved

Arial normal 100, Arial bold 100

Height: 166 mm (6.52") - Length: 290 mm (11.42") - Width: 187 mm (7.36")

2.5 Kg (5.5 lbs)

USB and parallel Centronics ports (cables supplied), RS 232 on request

Power supply: 100-240 V AC, 50-60 Hz, 1.8 A - Printer: 24 V DC, 3 A

Min / max operating temperature: 15° / 30° C (59° / 86° F)
Humidity: 20% to 65% non-condensing
Min / max storage temperature: -5° / +70° C (23° / 158° F)
Storage humidity: 20% to 70% non-condensing

Safety: CE mark (EN 60950)
EMC: CE mark B-Class / FCC B-Class

300 cards (0.25 mm - 10 mil) - 100 cards (0.76 mm - 30 mil)

Code 39, Code 2/5 interleaved

Arial normal 100, Arial bold 100

Height: 166 mm (6.52") - Length: 290 mm (11.42") - Width: 187 mm (7.36")

2.5 Kg (5.5 lbs)

USB and parallel Centronics ports (cables supplied), RS 232 on request

Power supply: 100-240 V AC, 50-60 Hz, 1.8 A - Printer: 24 V DC, 3 A

Min / max operating temperature: 15° / 30° C (59° / 86° F)
Humidity: 20% to 65% non-condensing
Min / max storage temperature: -5° / +70° C (23° / 158° F)
Storage humidity: 20% to 70% non-condensing

Safety: CE mark (EN 60950)
EMC: CE mark B-Class / FCC B-Class

300 cards (0.25 mm - 10 mil) - 100 cards (0.76 mm - 30 mil)



Tattoo Rewrite, Renew your Ideas

A ribbon-free technology

Cards include a thermo-sensitive material that turns visible or vanishes depending on the applied temperature. The same card can thus be erased and reprinted up to 500 times.

Unrivalled freedom in card design

The 300 dpi standard resolution and the large print area (48 x 80 mm - 1.90" x 3.15") provide you with unrivalled freedom in designing badges and cards, as graphical elements, images, texts and barcodes can easily be printed.

Outstanding marketing tool

The quick update feature and the endless graphic potential outline a brand new and efficient way for driving your messages to your customers:

- Print your latest deals on cards
- Catch customer's interest on the spot
- Interact with your customers





Quick update feature

- Thanks to the fast erase/print cycles, cards are customized on demand. Add new data in a snap and design a brand new card. Cards also provide advanced features when integrating a magnetic stripe or a contactless chip that can be encoded with the **Tattoo Rewrite**.

A cost effective solution

that is environmentally friendly too!

- No consumables
- Reusable cards up to 500 times

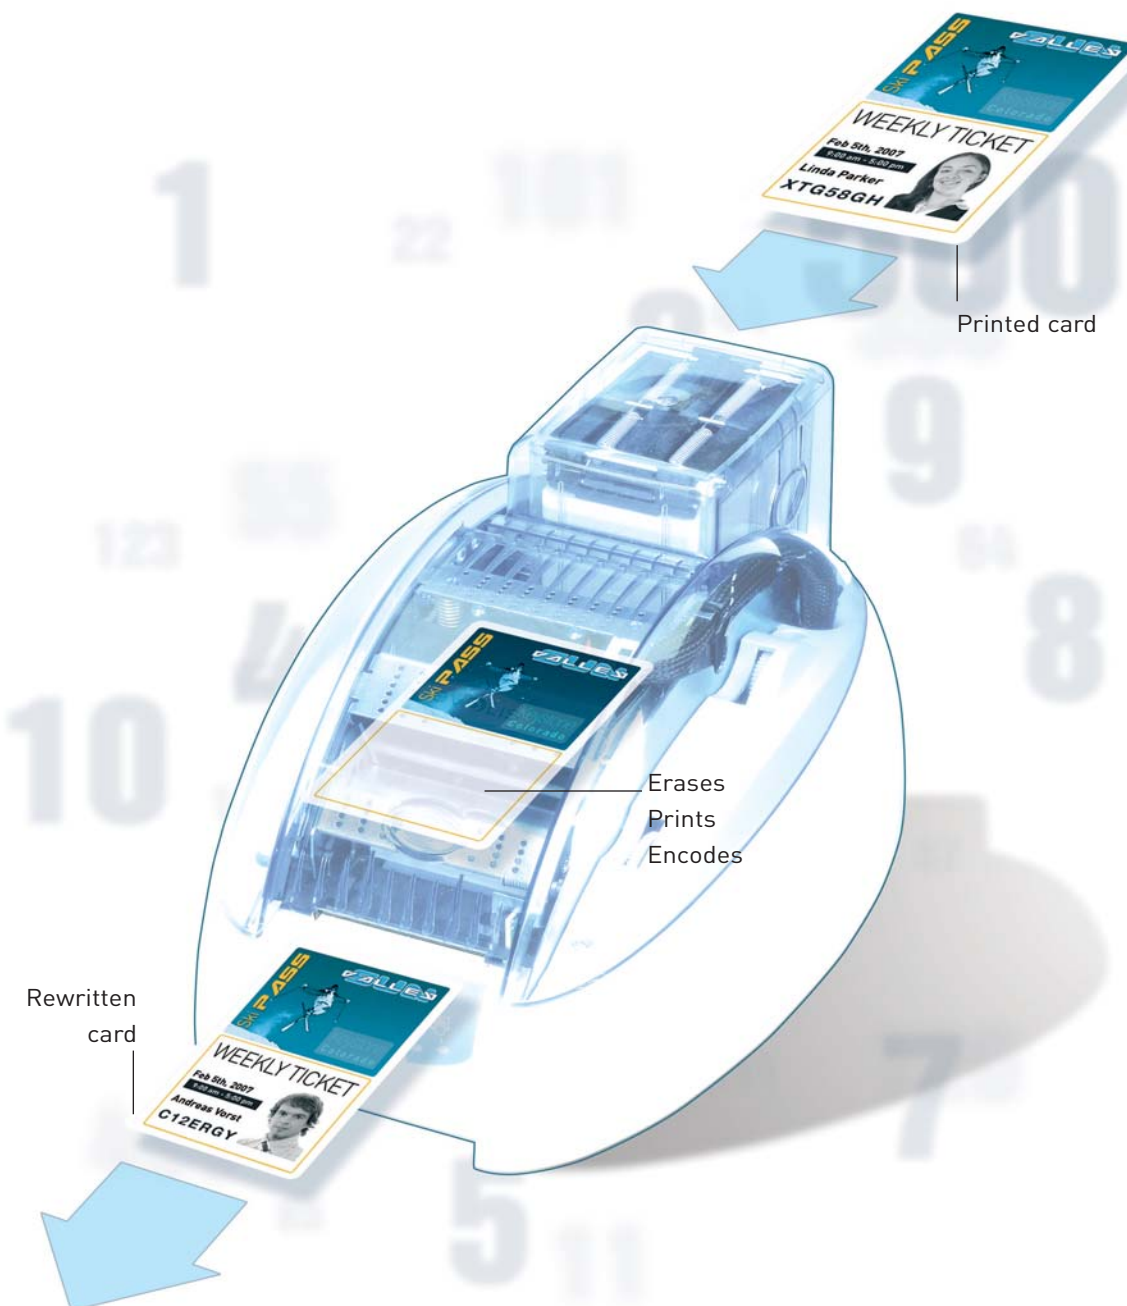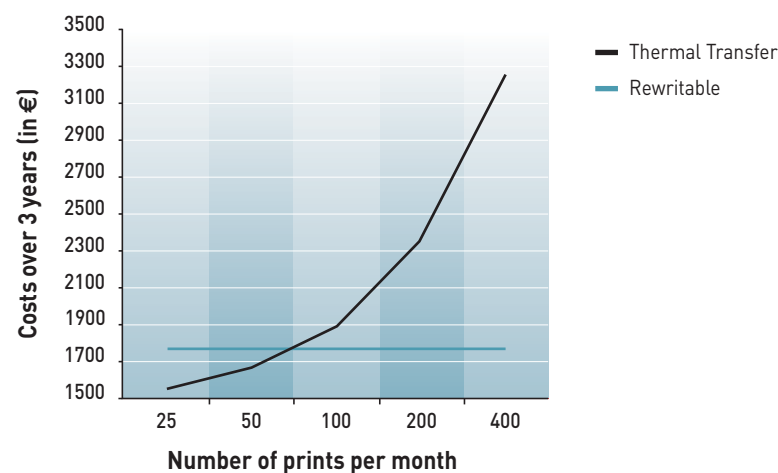

Target applications

Rewritable cards fit a wide array of market applications:

- Customer Loyalty
- Visitor Management
- Public Transportation
- Clubs / Societies
- Schools / Universities
- Healthcare organizations
- ...

Visitor Badges



Loyalty Cards



Ski Passes



Transportation Tickets